

650-670

85 ± 5%

- IEC61215:2021 / IEC61730:2023
 - IEC61701 / IEC62716 / IEC60068 / IEC62804
 - ISO9001:2015:
 - ISO14001:2015:
 - ISO45001:2018:
-

□□□□□□□□□□フット

	N
	264 (66 × 4)
	2382 × 1134 × 30 mm
	32.5 kg
	2.0mm,
	2.0 mm,
	IP68
	Class II
	Class C
	JK03M/JK03M2/ I A *
	4.0 mm ²
	600mm(), 400mm(), z

	2396 × 1110 × 1251 mm
	36 / , 72 / ,
)	720 /40



max) [Wp]	650	65	665	670
(Vmp) [V]	42.57	42.70	42.93	43.09
(Imp) [A]	15.27	15.41	15.48	15.55
(Voc) [V]	50.25	50.62	50.80	50.98
(Is) [A]	15.27	15.41	16.16	16.22
(STC) [%]	24.43	24.62	24.80	

	+3 %
ax)	6 %/°C
c)	4 %/°C
c)	5 %/°C

1000W/

LN6

(Pmax) [W]	
(Voc)	
(Is)	

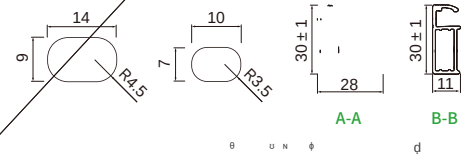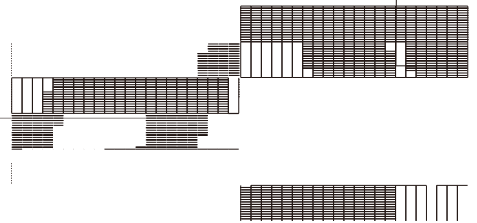

!

